



Poseidon Hydrophilic Nitinol Guide Wire

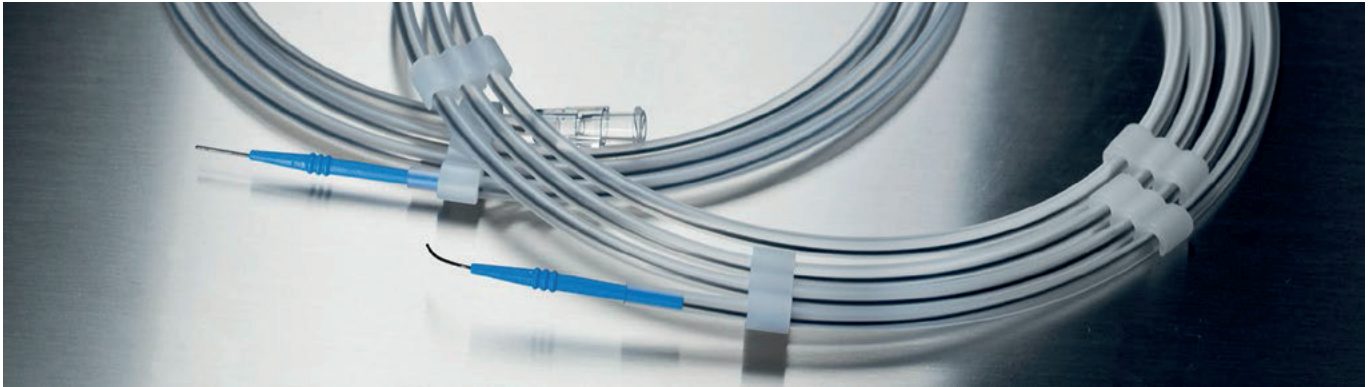

Dimensions

Ø 0.018" / 0.46 mm
Ø 0.025" / 0.64 mm
Ø 0.032" / 0.82 mm
Ø 0.035" / 0.89 mm
Ø 0.038" / 0.97 mm

Length

30 – 260 cm

Surface

Hydrophilic coated - Black

Distal tip form

Straight
Reshapable
Angled

Shaft stiffness

Standard
Stiff
(Stiff not available in dim: 0.018")

Tip stiffness

Floppy
Soft
Standard

Speciality Guide Wire:

Double Ended Flexible Tip

One end angled standard tip,
other end straight soft tip.
Stiff shaft stiffness.
Available dimension 0.035",
length 150 and 180 cm.

Customised products on request

Description of item code

HY-N-S/R/A-ST/SO/F-0xx-D/H-L
(example: HY-N-A-ST-035-D-150)

| | |
|-----|--|
| DE | Double ended |
| HY | Hydrophilic coating |
| N | Nitinol core |
| S | Straight tip |
| R | Reshapable tip |
| A | Angled tip |
| F | Floppy tip stiffness |
| SO | Soft tip stiffness |
| ST | Standard tip stiffness |
| 0xx | Diameter of the guide wire 018: 0.018" (0.46 mm) 025: 0.025" (0.64 mm) 032: 0.032" (0.82 mm) 035: 0.035" (0.89 mm) 038: 0.038" (0.97 mm) |
| D | Standard shaft |
| H | Stiff shaft |
| L | Length of the guide wire ■ 30 - 260 cm |